

Thermal transfer tape / Z-6230


1. Features

Z-6230 is transfer tape coated by thermal active acrylic PSA.

This tape have strong adhesion by heating after fixing.

This tape have slightly adhesion without heating, so it is possible to match position before fixing.

2. Composition

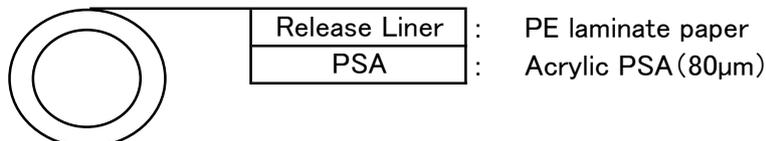

3. Specification

- Tape size : 1,250mm width (working width 1,220mm) × 100m length /roll (3inch paper core)
- Package : 1 roll/carton case (in hanging condition)
- MOQ : 1 case

4. Adhesive Properties

Measuring items			Z-6230
Thickness (μm)			80
Peel strength (N/25mm)	SUS	Room temperature (23°C × 50%RH)	20 - 30
	SUS	After heating (105°C × 2h)	30 - 40
Holding power (mm/1h)	SUS	40°C · 1kg	0.1 - 0.5

※The property values described in this document are actual measurements measured by us, not guaranteed values. Please consider and confirm whether the product is suitable for the intended use before use.

【測定条件】

- Peel strength : Attach 25mm wide sample to the adherend (2kg rubber roller is pressure-bonded once at a speed of 300mm/min.). Leave it for 30minutes under 23° C x 50% RH conditions, and peel off by 180° at a speed of 300 mm/min. and measure the value.
- Holding power : Attach a 25mm x 25mm sample to the adherend (2kg rubber roller/ 300mm/min. speed once for each direction), After leaving for 30min. Under the condition of 40°C, and then apply a load of 1kg for 1hrs, and measure the shifted length.

5. Caution

【Handling precautions】

- Store in a cool and dark place away from high temperature and direct sunlight.

【Safety and hygiene precautions】

- Do not stick directly on the skin.
- Before using, please wipe any oil, moisture and dust etc. on the adherent surface.
- If the usage environment is low temperature, it may be difficult to attach. Please store and use at room temperature in winter.
- Please read the Safety Data Sheet (SDS) before use. Please ask the sales department for SDS.